




Lifting Magnets


X-MAG permanent lifting magnets incorporate our unique design with the strongest NdFeB magnets. They are compact, yet very strong.

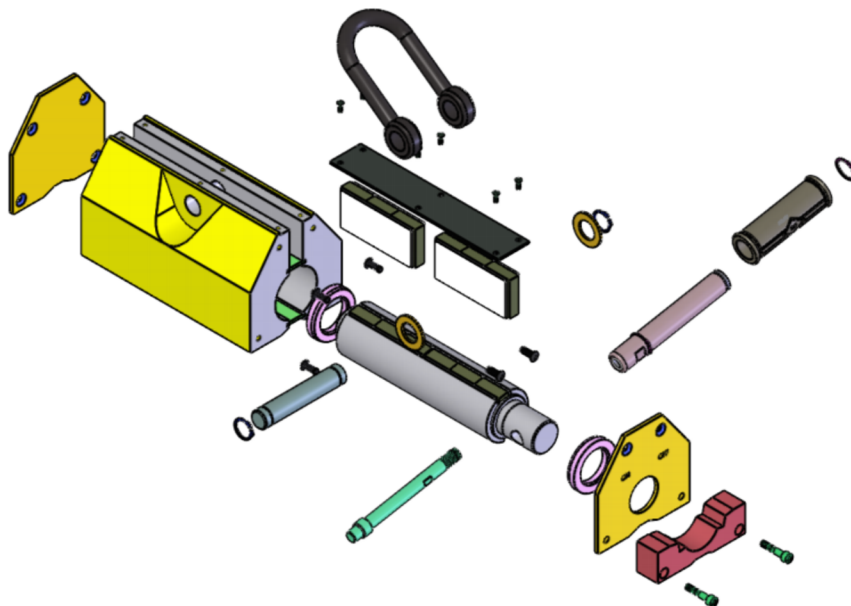



Manufacturing Workshop



Manufacturing Process


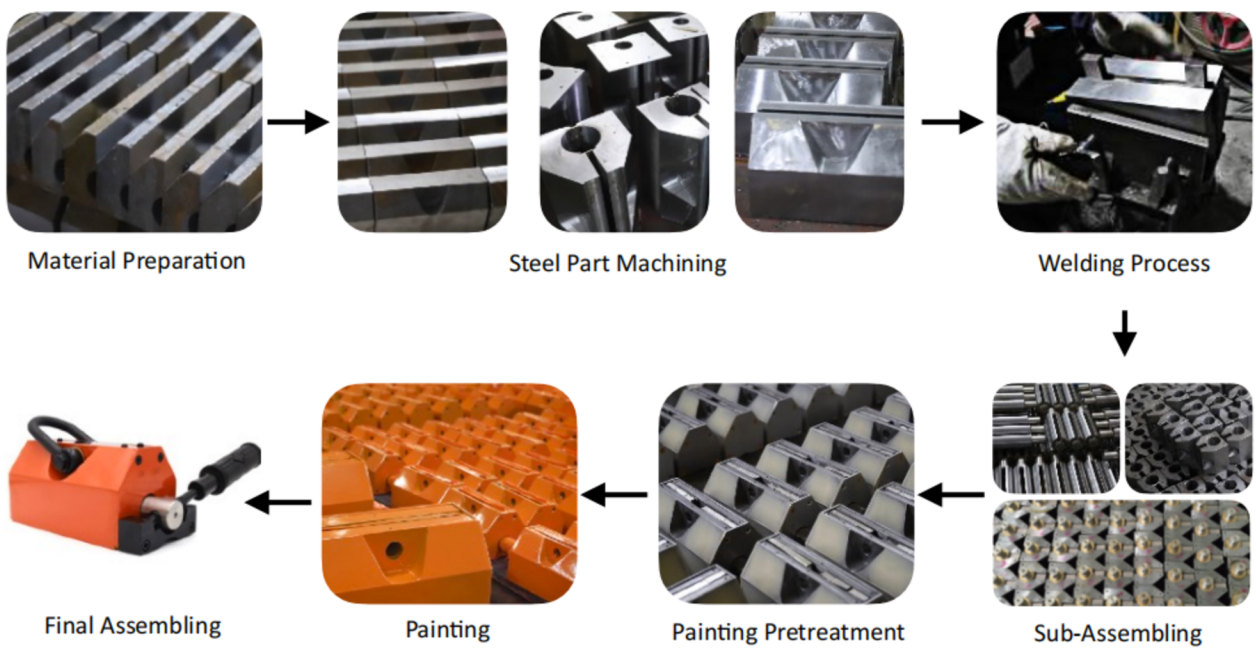


XL1 Style

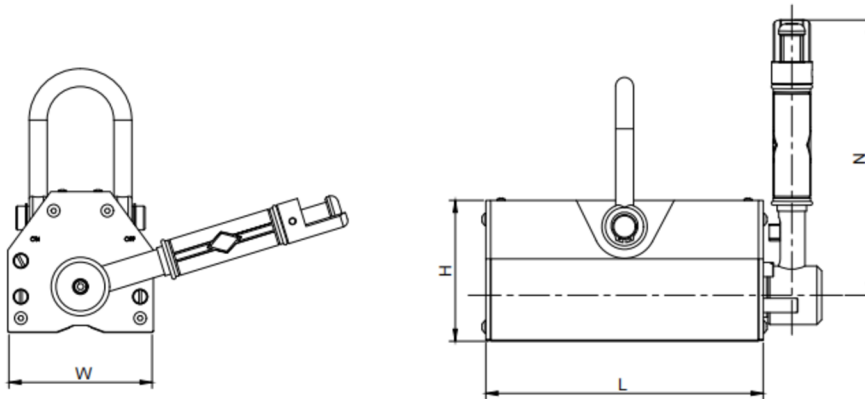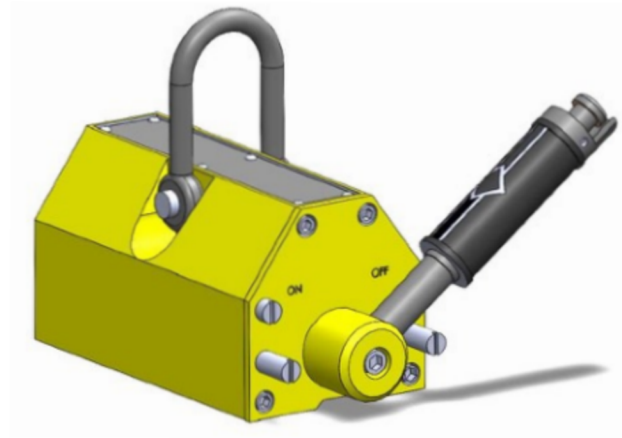



Model No.	Flat Rated Pull Force	Cylindrical Rated Pull Force	Max. Pull-off Force	W	L	H	N	Max Working Temp.	Dead Weight
	kg	kg	kg	mm	mm	mm	mm	° C	kg
XL1-100	100	50	350	64	92	67	107	80	3
XL1-300	300	150	1050	92	162	91	155	80	7.5
XL1-600	600	300	2100	122	233	118	196	80	23
XL1-1000	1000	500	3500	179	268	164	255	80	55.5
XL1-2000	2000	1000	7000	234	378	212	426	80	125
XL1-3000	3000	1500	10500	310	497	252	505	80	220
XL1-6000	6000	3000	21000	442	621	210	548	80	440

XL2 Style

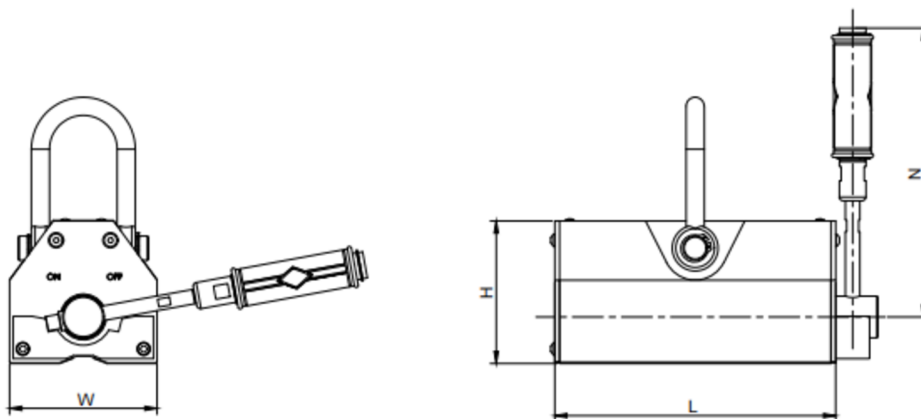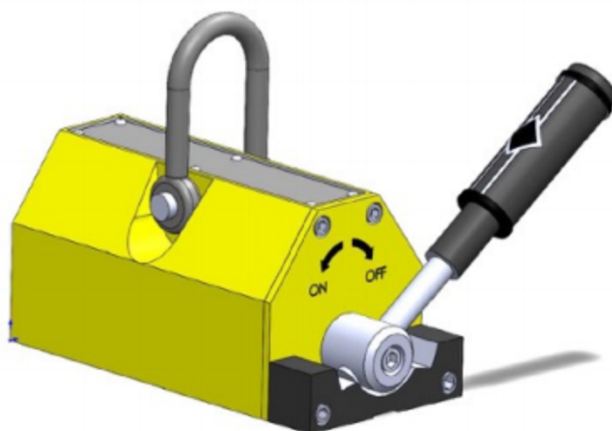




Model No.	Flat Rated Pull Force	Cylindrical Rated Pull Force	Max. Pull-off Force	W	L	H	N	Max Working Temp.	Dead Weight
	kg	kg	kg	mm	mm	mm	mm	° C	kg
XL2-300	300	150	1050	92	162	91	207	80	7.5
XL2-600	600	300	2100	122	233	118	247	80	23
XL2-1000	1000	500	3500	179	268	164	275	80	55.5
XL2-2000	2000	1000	7000	234	378	212	370	80	125

XL3 Style

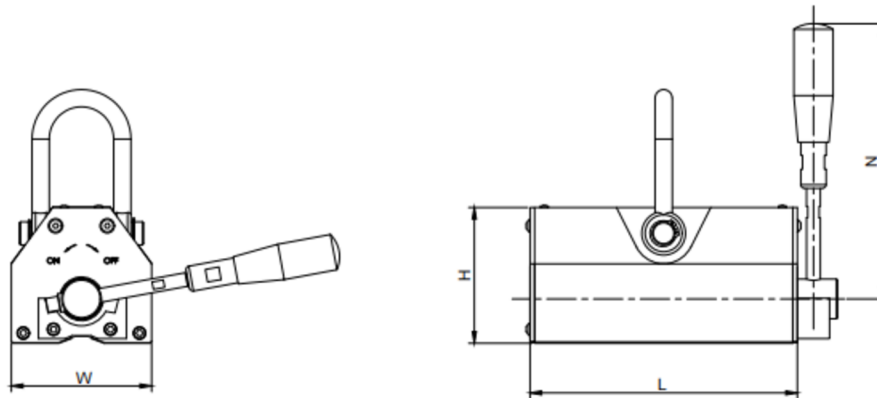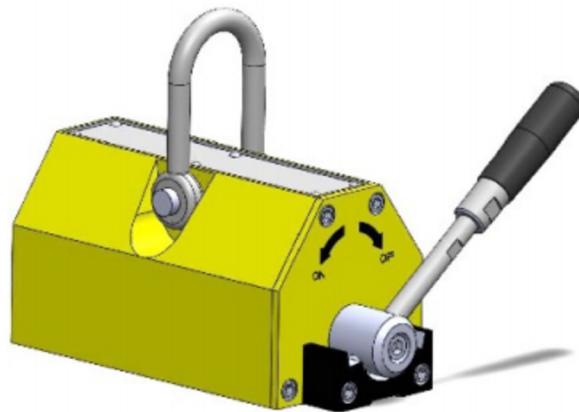



Model No.	Flat Rated Pull Force	Cylindrical Rated Pull Force	Max. Pull-off Force	W	L	H	N	Max Working Temp.	Dead Weight
	kg	kg	kg	mm	mm	mm	mm	° C	kg
XL3-300	300	150	1050	92	162	91	180	80	7.5
XL3-600	600	300	2100	122	233	118	185	80	23
XL3-1000	1000	500	3500	179	268	164	210	80	55.5
XL3-2000	2000	1000	7000	234	378	212	365	80	125

XL4 Style

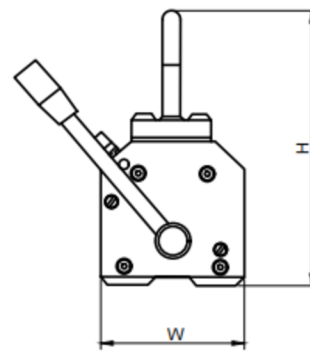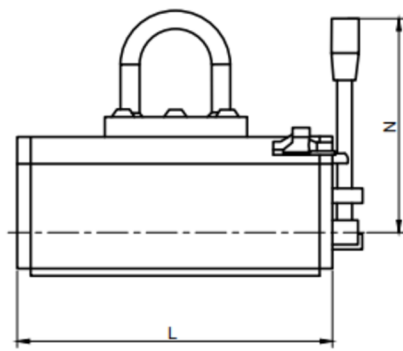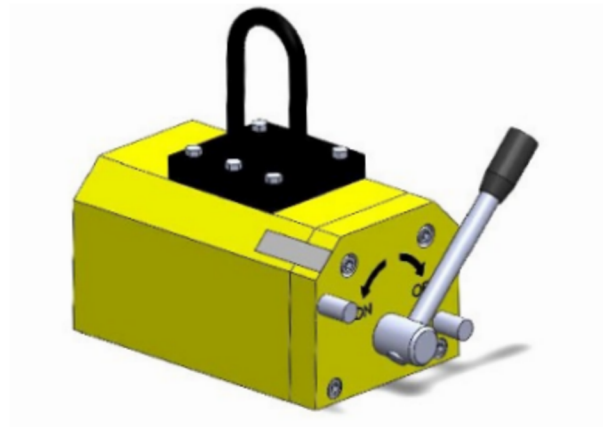



Model No.	Flat Rated Pull Force	Cylindrical Rated Pull Force	Max. Pull-off Force	W	L	H	N	Max Working Temp.	Dead Weight
	kg	kg	kg	mm	mm	mm	mm	° C	kg
XL4-300	300	150	1050	80	160	179	140	80	9.5
XL4-600	600	300	2100	105	243	210	170	80	23
XL4-1000	1000	500	3500	176	280	305	285	80	58
XL4-2000	2000	1000	7000	198	380	391	335	80	116

XL5 Style

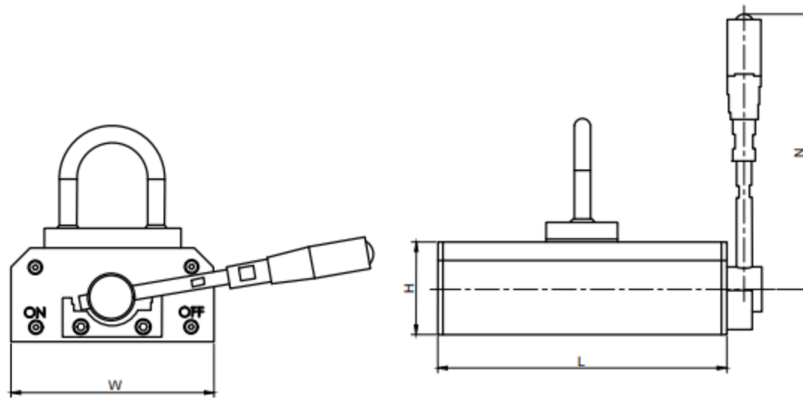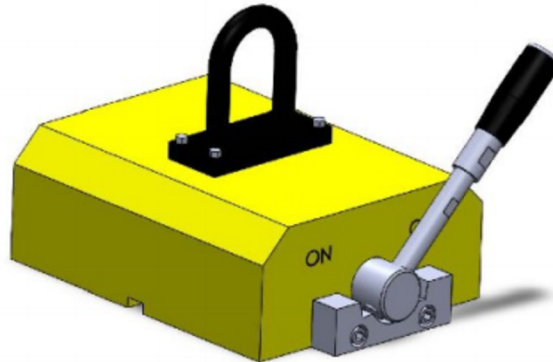



Model No.	Flat Rated Pull Force	Cylindrical Rated Pull Force	Max. Pull-off Force	W	L	H	N	Max Working Temp.	Dead Weight
	kg	kg	kg	mm	mm	mm	mm	° C	kg
XL5-600	600	200	2100	163	233	74	185	80	23
XL5-1000	1000	300	3500	190	300	85	210	80	58
XL5-2000	2000	600	7000	250	400	77	365	80	116

XL6 Style

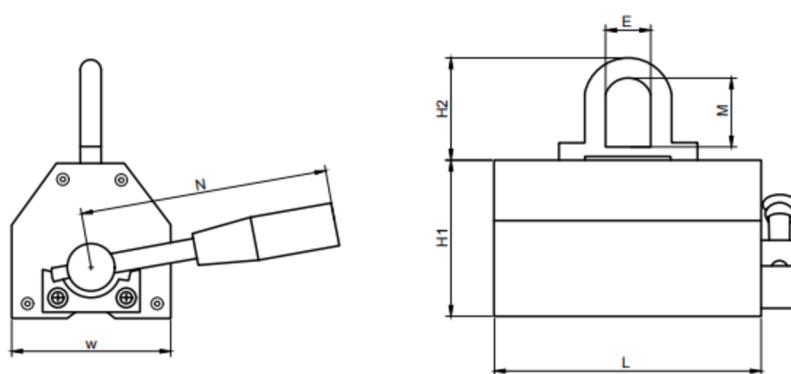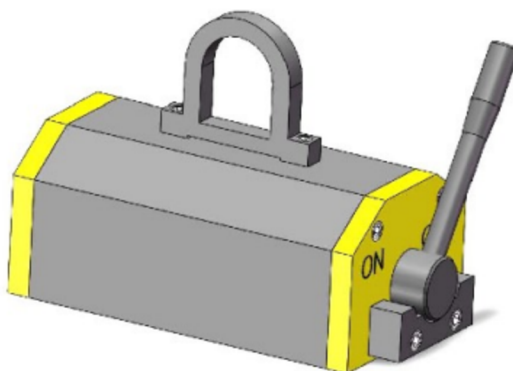

Model No.	Flat Rated Pull Force	Cylindrical Rated Pull Force	Max. Pull-off Force	W	L	N	H1	H2	M	E	Max Working Temp.	Dead Weight
	kg	kg	kg	mm	mm	mm	mm	mm	mm	mm	° C	kg
XL6-100	100	50	350	64	92	148	67	54	35	28	80	3
XL6-300	300	150	1050	92	162	180	91	70	47	40	80	7.5
XL6-600	600	300	2100	122	233	185	118	95	64	50	80	23
XL6-1000	1000	500	3500	179	268	210	164	95	64	50	80	55.5
XL6-2000	2000	1000	7000	234	378	365	212	120	80	60	80	125

XL7 Style

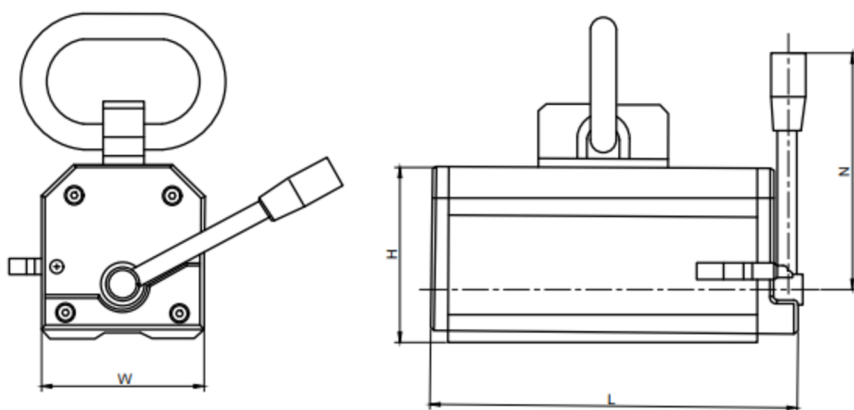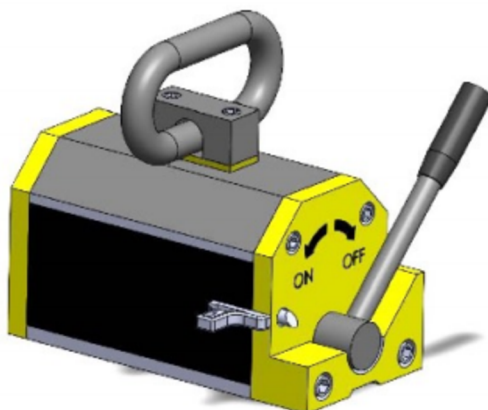

Model No.	Flat Rated Pull Force	Cylindrical Rated Pull Force	Max. Pull-off Force	W	L	H	N	Max Working Temp.	Dead Weight
	kg	kg	kg	mm	mm	mm	mm	° C	kg
XL7-150	150	75	450	60	147	65	136	80	3.5
XL7-200	200	100	600	80	140	85	136	80	6
XL7-300	300	150	900	80	170	91	136	80	9.5
XL7-500	500	250	1500	100	225	110	150	80	16
XL7-1000	1000	500	3000	176	300	165	285	80	58
XL7-2000	2000	1000	6000	200	400	210	335	80	116.5